



## Vibratory Membrane Treatment and Reuse System

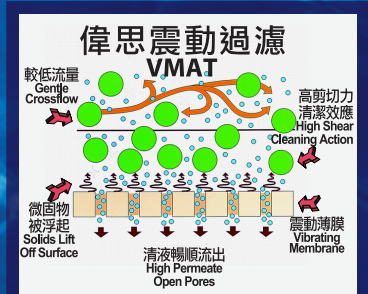

### >>> 應用/Applications:

|           |  |
|-----------|--|
| 廢潤滑油再生    | Used Lubricant Recycling                 |
| 石油化工及廢水處理 | Petro-chemical & Waste Water Treatment   |
| 廢五金切削液處理  | Waste Emulsified Cutting Fluid Treatment |
| 化工處理      | Chemical Process                         |
| 填埋場滲濾液處理  | Landfill Leachate                        |
| 食品及飲料製造   | Food & Beverage Manufacturing            |
| 生化科技及藥業   | Bio-technology & Pharmacy                |

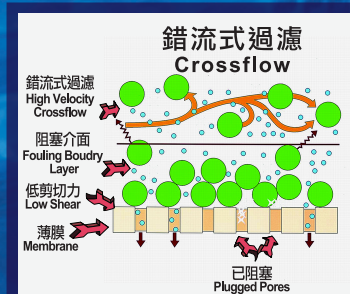


**抗阻塞 · 一次過濾**  
Non Fouling · Single Pass Operation

**高效率 · 佔地少**  
High Efficiency · Small Footprint

處理量/Daily Capacity:  
100-1,000 tons/day/system



| 型號 / Model  | i84                              | i36                             | P80                           | P                             |
|---|----------------------------------|---------------------------------|-------------------------------|-------------------------------|
| 機身尺寸(已包括薄膜模組)<br>Dimensions Including Filter Pack | L1.2m x W1.2m x H5m              | L1.2 m x W1.2m x H3.3m          | L92 cm x W85cm x H2.2m        | L76 cm x W61 cm x H1.9m       |
| 機體重量 / Weight                                     | Body-1600kg / Filter Pack-1000kg | Body-1300kg / Filter Pack-400kg | 500 kg (Filter Pack Included) | 273 kg (Filter Pack Included) |
| 過濾面積 / Filtration Area                            | 1050 / 1300 / 1500 sq ft         | 400 / 450 / 600 sq ft           | 80 sq. ft                     | 16.6 sq ft                    |
| 操作壓力 / Operating Pressure - MF                    | 30-80 psi                        | 30-80 psi                       | 30-80 psi                     | 30-80 psi                     |
| UF  | 100-250 psi                      | 100-250 psi                     | 100-250 psi                   | 100-250 psi                   |
| NF  | 300-500 psi                      | 300-500 psi                     | 300-500 psi                   | 300-500 psi                   |
| RO  | 400-550 psi                      | 400-550 psi                     | 400 550 psi                   | 400-550 psi                   |
| 最大聲量 / Max. Sound Level                           | 95 dB                            | 95 dB                           | 80 dB                         | 80 dB                         |
| 供電電壓 / Voltage                                    | 380 VAC 3-phase 50 Hz            | 380 VAC 3-phase 50 Hz           | 380 VAC 3-phase 50 Hz         | 380 VAC 3-phase 50 Hz         |
| 最大負載電流 / Max. Load Current                        | 60 A                             | 60 A                            | 20 A                          | 20 A                          |
| 正常負載電流 / Normal Running Current                   | 13 A                             | 13 A                            | 6 A                           | 1.5 A                         |

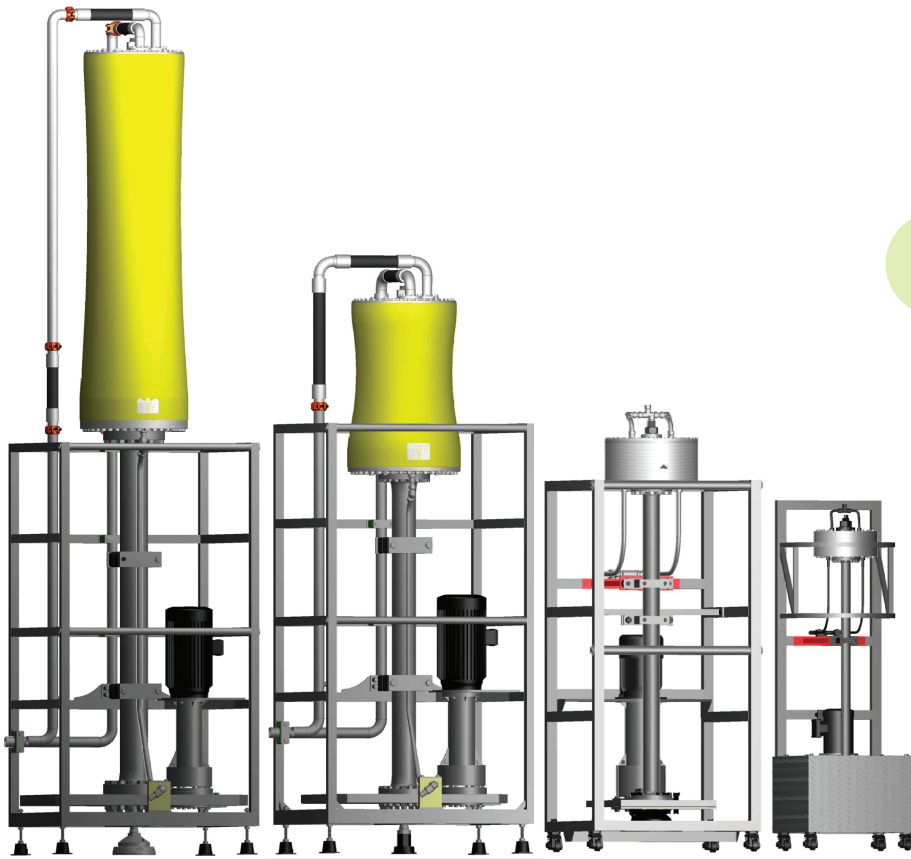

i84

i36

P80

P

>>> **優點 / Features:**

- > 高流量  
High Flow Rate
- > 抗阻塞  
Anti-fouling
- > 高效率  
High Efficiency
- > 低成本  
Low Cost
- > 高濃縮比  
High Recovery Rate
- > 性能穩定  
Steady Performance
- > 體積小巧  
Small Footprint
- > 靈活測試  
Flexible Testing